



Features

- Isolated 4-20mA
- 4 channel of inputs
- Modbus RTU interface
- USB to serial inbuilt converter
- Baud rate and address config by DIP switch
- Power supply from external source or USB
- 4-20mA device connection indicators
- Wide power supply range up to 36V
- DIN rail mounting
- Aluminium enclosure

The ADI-524 is 4-20mA analog input interface converter to Modbus RTU over RS485 or over USB. It has 4 opto-isolated analogue inputs and RS485/USB output. Extra isolated 24V power supply for 4-20mA sensor/devices and DIP switch for baud-rate and address setting.

USB port make this device perfect to use with industrial computers and gateways with USB port.




It can be mounted on standard DIN rail or by using clamps.

Description	Parameter
4-20mA inputs	
Input number	4
Type	4-20mA isolated from rest of circuit. Not isolated from each other
Isolation	2kVAC for 60s
ADC converter	16Bit $\Delta\Sigma$ A/D
Isolated power supply	24V/25mA
USB	
USB port number	1
USB	USB 2.0
Connector	USB type B
Protection	IEC 61000-4-2 level 4: - 15 kV (air discharge) - 8 kV (contact discharge)
Serial RS485 Modbus RTU	
Port number	1
Interface Type	RS485
Data Rate	9600, 19200, 38400, 115200
Signals	A and B and ground

Description	Parameter
Connector	Pluggable screw socket
Protection	Opto-isolated 2.5kV RMS per UL 1577 IEC 61000-4-2 level 4: - 15 kV (air discharge) - 8 kV (contact discharge) MIL STD 883C-Method 3015-6: class 3. (human body model) Fail-safe receiver for bus open, short and idle
Modbus address	1-15
System Functions Indicators	
Indicators	4x input presence, ACT – activity, power – dual colour
System Support	
OS for USB	Linux, Windows, MAC OS
Modbus RTU	All type PLC, gateways, computers etc with Modbus RTU interface
Power Supply	
Power Voltage range	8-36V DC or 5V from USB

Description	Parameter
Power consumption	3W average
Connector	5 pin (+, -) pluggable screw socket common with RS485
Protection	Reverse polarity, surge
Physical Characteristics	
Installation	DIN-Rail, clamp
Housing	Aluminium

Description	Parameter
Weight	130g
Dimensions	88mm x 35mm x 44mm (W x H x D)
Environmental Specification	
Operating Temp.	-25 ~ 85°C (-13 ~ 158°F)
Storage Temp.	-40 ~ 85°C (-40 ~ 176°F)
Ambient RH	5% to 95% (non-condensing)

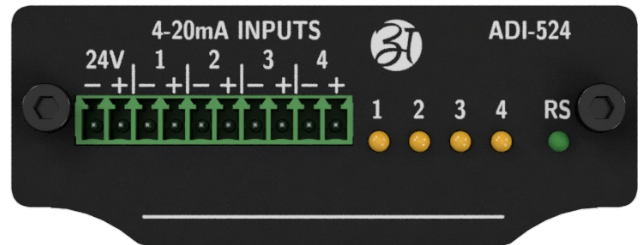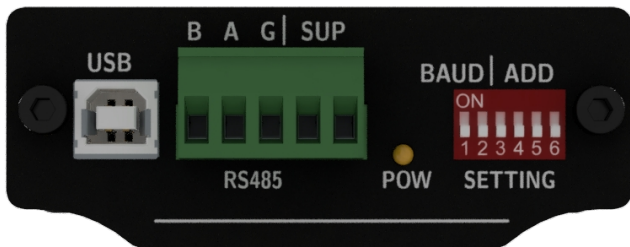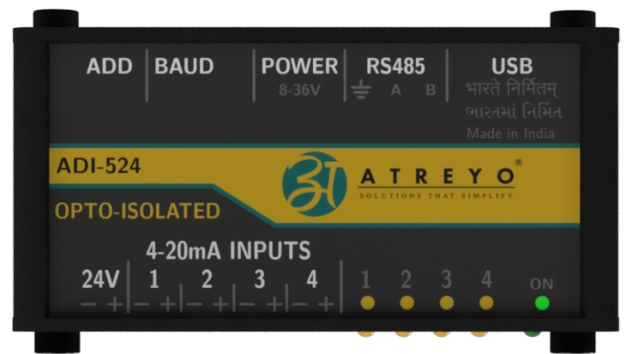

Copyright

Copyright © 2023 Atreyo Research and Development LLP. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development LLP. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development LLP. Atreyo Research and Development LLP shall not unreasonably withhold or deny such consent but shall be entitled to receive additional equitable remuneration in connection with its grant of consent.

Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development LLP.

All other trademarks and copyrights are the property of their respective owners.

Disclaimer

- All dimensions mentioned in the drawings are not to scale and may vary/differ due to construction contingencies and site conditions which are subject to change as may be decided by the company.
- The specifications and amenities mentioned in this document and promotional documents are only representational and informative. The descriptions in this specification are based on the default configuration of your device.
- Images used in this specification may differ in appearance from the actual product.
- The Atreyo Research and Development LLP reserves rights to make additions, deletions, alterations or amendments as and when it deems fit and proper, without any prior notice.

**Atreyo Research
& Development LLP**

**+91 9727741417
info@atreyo.in**

414, Sunrise Mall, Mansi Circle,
Vastrapur
Ahmedabad 380015, India