


TECHNICAL SPECIFICATION

Bus Passenger Information Display

BUS-79

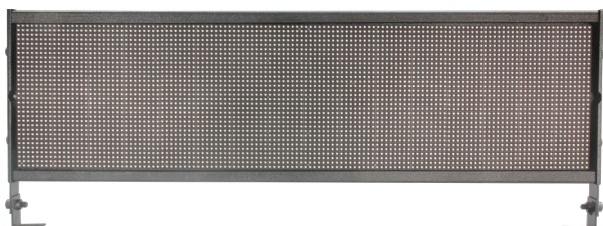

Features


- Two line of text in English, Hindi, Gujarati etc.
- 7 colours for each region of display
- 6 colour of background
- Support all font styles
- All Indian alphabets support
- High brightness
- Up to 3 region
- Scrolling in any direction
- Up to 99 sequences in 3 language

Atreyo BUS-79 is multicolour destination display to use in buses to display destination or route. The display has inbuilt controller with LCD display. It can display from 1 to 3 region with alphanumeric text. All's region size can be individually adjusted. It can display up to 3 languages sequentially. The

destination list is prepared with provided easy PC software - "Atreyo Destination Manager" and after transferred to the display through pen drive. In bus user has only to select proper route / information from the list and apply. This is the best option to error-free operation.

Description	Parameter
Size of displaying area	768 x 192mm (W x H)
Size of body of display	798 x 252 x 60mm (W x H x D)
Pitch of pixels	6mm
Display resolution	128 (H) x 32 (V)
Colour	RGB 7 colours, day light readable
LED type	SMD PLCC-2
Angle of viewing	120°V, 120°H
Max. viewing distance	60m
Intensity of Light	6000 cdm or more
Line of text	Up to 2 line and up to 3 region English/Hindi any other Indian language
Line height	Flexible
Data storage	Internal flash memory
Storage sequences	Up to 99 in 3 languages
Sequence loading	By USB pen drive
Sequence creation	By dedicated Windows PC software
Controller	Inbuilt in display with 2 line alphanumeric LCD and 3 keys keyboard
Brightness	Auto-brightness according ambient

Description	Parameter
	light or manual by keypad
Language	Support of up to 3 self changeable languages
Power supply	24V DC from bus power supply
Powers consumption	Maximum 60W Average 40W
Body material	Powder coated MS
Mounting	Bottom on the desk board or ruff mounting
Environmental specifications	Operating Temperature: 0 to +70°C Humidity: 5% to 95% RH Sealing IP54

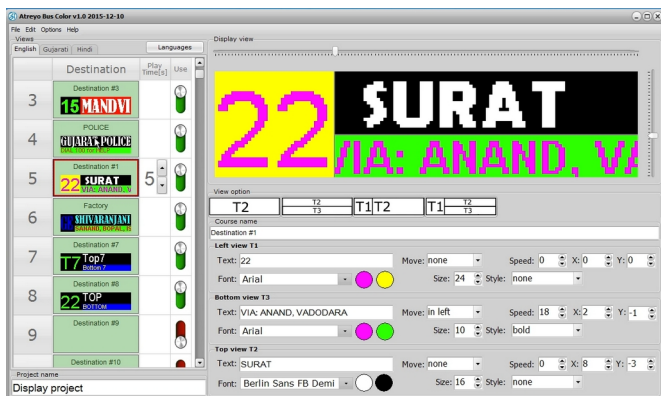

Copyright

Copyright © 2021 Atreyo Research and Development LLP. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development LLP. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development LLP. Atreyo Research and Development LLP shall not unreasonably withhold or deny such consent but shall be entitled to receive additional equitable remuneration in connection with its grant of consent.

Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development LLP.

All other trademarks and copyrights are the property of their respective owners.

Disclaimer

- All dimensions mentioned in the drawings are not to scale and may vary/differ due to construction contingencies and site conditions which are subject to change as may be decided by the company.
- The specifications and amenities mentioned in this document and promotional documents are only representational and informative. The descriptions in this specification are based on the default configuration of your device.

Atreyo Research & Development LLP

+91 9727741417
info@atreyo.in

414, Sunrise Mall, Mansi Circle, Vastrapur
Ahmedabad 380015, India

- Images used in this specification may differ in appearance from the actual product.
- The Atreyo Research and Development LLP reserves rights to make additions, deletions, alterations or amendments as and when it deems fit and proper, without any prior notice.