

TECHNICAL SPECIFICATION

Programmable OpenWRT LTE IoT Gateway with RS485, RS232 and I/O

AG-702



Features

- OpenWRT system
- Fully programmable Linux environment
- Additional 512MB memory as overlay
- 4G LTE, GSM, WiFi and two Ethernet ports
- GNSS
- 2 opto-isolated digital inputs
- 1 potential free relay output
- Opto-isolated RS485 and RS232
- USB host with storage support
- Cellular signal strength indicator
- Wide power supply range
- Aluminium enclosure
- DIN rail mounting

AG-702 is an innovative 4G LTE cellular Gateway with 2 ethernet ports, WiFi, RS485, RS232 and digital I/Os working on OpenWRT system. It can connect in multiple ways to the Internet with dual SIM capability and a

range of advanced functions for mission critical IoT or M2M applications. AG-702 also support MQTT protocol for Cloud application and Modbus TCP/IP or RTU for industrial applications.

Description	Parameter
Processor	
Type	MIPS24KEc
Clock	580MHz
RAM Memory	
Memory size	256MB DDR2
Memory speed	1066max
Storage	
Internal flash	64MB+512MB ExtRoot support (overlay)
USB	
USB port number	1
USB type	USB 2.0, host with storage support
Connector	USB type A
Protection	IEC 61000-4-2 level 4:

Description	Parameter
USB overload	- 15 kV (air discharge)
	- 8 kV (contact discharge)
Serial RS485	
Port number	1
Interface Type	RS485
Data Rate	600 – 460800 bps
Signals	A and B
Connector	Pluggable push-in
Protection	Opto-isolated 2.5 kV RMS per UL 1577
	IEC 61000-4-2 level 4:
	- 15 kV (air discharge)
	- 8 kV (contact discharge)
Fail-safe receiver for bus open, short and idle	

Description	Parameter
Serial RS232	
Port number	1
Interface type	RS232
Data rate	300 – 230400 bps
Signals	RX, TX, RTS, CTS
Connector	Pluggable push-in
Protection	Opto-isolated 2.5kV RMS per UL 1577
	IEC 61000-4-2 level 4:
	– 15 kV (air discharge) – 8 kV (contact discharge)
Ethernet	
Number	2
Type	10/100M port
Connector	RJ45 with LED indicators
PoE	Spare pair on ETH-1
WiFi	
WiFi type	2.4GHz
WiFi standard	IEEE 802.11/a/b/g/n, Access Points
Antenna connector	SMA female
Cellular Modem¹	
Band	Please refer table of cellular network on page 3 and 4.
SIM card	Dual nanoSIM, anti-loss tray type
	3V/1.8V
Antenna connector	SMA female
GNSS²	
GNSS systems	GPS, BDS, Galileo, GLONASS, QZSS
Antenna connector	SMA female
Digital Inputs	
Input number	2
Input type	Opto-isolated 2.5kV
Configuration	Separate IN-GND
Connector	Pluggable push-in
Max v_{in}	30V DC
Logic 1 Voltage	3.5V to max v_{in}
Relay Outputs	
Output number	1
Output type	NO (normal open)
Load_{max}	3A 160V AC or 3A 30V DC
Connector	Pluggable push-in
System Functions Indicators	
Indicators	ACT – activity


¹ Apply to LT models. Refer model selection chart. LTE/GSM Bands are mentioned for in Cellular table section on page 3 and 4.

² Apply to LT models. Refer ordering chart.

Description	Parameter
System Functions Indicators	
	Cellular signal level – 4 LED
	Custom use
	Out enable
	Cellular
	WiFi
	IN-1 and IN-2
	SIM-1 and SIM-2
System	
Operating systems	OpenWRT 23.05, Kernel 5.15.71, Atreyo Environment V1.01.02
Bootling source	Flash memory
Power Supply	
Power supply	8-48V (or 8-60V or 8-36V DC ³)
Power consumption	1.6W (24V without LTE and relay on)
Connector	Pluggable push-in (+, -, earthing)
PoE	Passive PoE over spare pairs. Not compatible with IEEE802.3af, 802.3at and 802.3bt standards
Protection	Reverse polarity, over Voltage
Physical Characteristics	
Installation	DIN-Rail, clamp
Housing	Aluminium
Weight	240g
Dimensions	88mm x 87mm x 35mm
Environmental Specification	
Operating temp.	-20 ~ 65°C (-4 ~ 149°F)
Storage temp.	-40 ~ 85°C (-40 ~ 185°F)
Ambient RH	5% ~ 95% (non-condensing)

³ Refer ordering chart.

Gateway

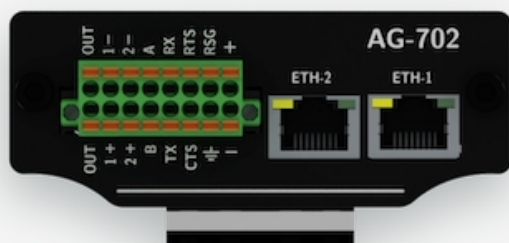

Cellular modem specification of IN (India) version

IN version of gateway		Cellular network modem details	
Band LTE FTD	B1/ 3/ 5/ 8		
Band LTE TDD	B34/ 38/ 39/ 40/ 41		
Band GSM	B3/ 8 (900/1800MHz)		
GPRS slot	Multi-slot class 12/10		
Bandwidth	1.4/ 3/ 5/ 10/ 15/ 20 MHz		
Output power	LTE-FDD		Class 3 (23 dBm \pm 2 dB)
	LTE-TDD		Class 3 (23 dBm \pm 2 dB)
	EGSM900		Class 4 (33 dBm \pm 2 dB)
	DCS1800		Class 1 (30 dBm \pm 2 dB)
Maximum data rate	LTE-FDD		10 Mbps (DL)/ 5 Mbps (UL)
	LTE-TDD		8.96 Mbps (DL)/ 3.1 Mbps (UL)
	GPRS		85.6 Kbps (DL)/85.6 Kbps (UL)

Cellular modem specification of EU (Europe and India) version

EU version of gateway		Cellular network modem details
Band LTE FTD	B1/3/5/7/8/20/28	
Band LTE TDD	B38/ 40/ 41	
Band GSM	B2/3/5/8 (900/1800MHz)	
GPRS slot	Multi-slot class 12/10	
Bandwidth	1.4/ 3/ 5/ 10/ 15/ 20 MHz	
Output power	LTE-FDD	Class 3 (23 dBm \pm 2 dB)
	LTE-TDD	Class 3 (23 dBm \pm 2 dB)
	EGSM900	Class 4 (33 dBm \pm 2 dB)
	DCS1800	Class 1 (30 dBm \pm 2 dB)
Maximum data rate	LTE-FDD	10 Mbps (DL)/ 5 Mbps (UL)
	LTE-TDD	8.96 Mbps (DL)/ 3.1 Mbps (UL)
	GSM	85.6 kbps (DL)/ 85.6 kbps (UL)
Power	Compliant to GSM phase 2/2+	
	– Class 4 (2 W 900MHz)	
	– Class 1 (1 W 1800MHz)	

Cellular modem specification of GL (global) version

GL version of gateway		Cellular network modem details
Band LTE FTD	B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28	
Band LTE TDD	B38/B39/B40/B41	
Band WCDMA	B1/B2/B4/B5/B6/B8/B19	
Band GSM	B2/B3/B5/B8	
Output power	GSM850	Class 4 (33 dBm \pm 2 dB)
	EGSM900	Class 4 (33 dBm \pm 2 dB)
	DCS1800	Class 1 (30 dBm \pm 2 dB)
	PCS1900	Class 1 (30 dBm \pm 2 dB)
	GSM850 8-PSK	Class E2 (27 dBm \pm 3 dB)
	EGSM900 8-PSK	Class E2 (27 dBm \pm 3 dB)
	DCS1800 8-PSK	Class E2 (26 dBm \pm 3 dB)
	PCS1900 8-PSK	Class E2 (26 dBm \pm 3 dB)
	WCDMA	Class 3 (24 dBm \pm 1/-3 dB)
	LTE-FDD	Class 3 (23 dBm \pm 2 dB)
	LTE-TDD	Class 3 (23 dBm \pm 2 dB)
Maximum data rate LTE	LTE-FDD	150 Mbps (DL)/Max. 50 Mbps (UL)
	LTE-TDD	130 Mbps (DL)/Max. 30 Mbps (UL)
Maximum data rate UMTS	DC-HSDPA	42 Mbps (DL)
	HSUPA	5.76 Mbps (UL)
	WCDMA	384 kbps (DL)/Max. 384 kbps (UL)
Maximum data rate GSM	EDGE	296 kbps (DL)/Max. 236.8 kbps (UL)
	GPRS	107 kbps (DL)/Max. 85.6 kbps (UL)

Standard model list

These are models in regular production. Other models are only made on order with a minimum order quantity. Please [contact us](#) if you require a custom order.

Model	Hardware Options				Supply Voltage	More information
	Cellular Network			GNSS		
AG-702	GPRS	3G	LTE			
AG-702-V48					8-48V	Without cellular modem
AG-702-LT-EU-V48	✓		✓	✓	8-48V	Model for India and EU
AG-702-LT-GL-V48	✓	✓	✓	✓	8-48V	Global model

Table with model structure for ordering

Model Structure			
Model structure example		AG-702-LT-EU-V48	
Base model name			
AG-702			
Cellular communication modem			
LT (cellular communication modem present)			
LTE/GSM module regional information			
IN (cellular modem for India)			
EU (cellular modem for India and Europe)			
GL (global cellular modem)			
Power supply range			
V60 (from 8V to 60V DC)			
V36 (from 8V to 36V DC)			
V48 (from 8V to 48V DC)			

**For more details
scan or click on
QR code**



Copyright

Copyright © 2025 Atreyo Research and Development LLP. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development LLP. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development LLP.

Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development LLP.

All other trademarks and copyrights are the property of their respective owners.

Disclaimer

- The information contained in this datasheet is provided "as is" and is subject to change without notice. While every effort has

been made to ensure the accuracy and completeness of the information contained herein, Atreyo Research and Development LLP assumes no responsibility or liability for any errors or omissions.

- Images used in this specification may differ in appearance from the actual product.
- All dimensions mentioned in the drawings are not to scale and are subject to change and update as may be decided by the Atreyo Research and Development LLP.
- Atreyo Research and Development LLP makes no warranties, either express or implied, regarding the contents of this document, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.
- Users of this datasheet should verify the applicability and suitability of the information and procedures to their particular use. Atreyo Research and Development LLP shall not be liable for any damages, including but not limited to direct, indirect, special, incidental, or consequential damages, arising from or related to the use or inability to use this datasheet or the products described herein.
- By using this datasheet, you agree to the terms and conditions stated above.

**Atreyo Research
& Development LLP**

**+91 9727741417
info@atreyo.in**

414, Sunrise Mall, Mansi Circle,
Ahmedabad, Gujarat, India